




Product Data Sheet

Beveled Edge 42 & 60

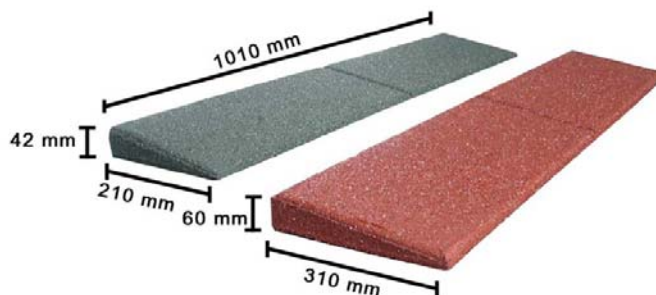

	Beveled Edge 42	Beveled Edge 60
Dimensions	1010 x 210 mm	1010 x 310 mm
Strength	42 / 15 mm	60 / 15 mm
Weight	5 kg	10 kg
Material	Polyurethan bound rubber granules	
Standardcolours	redbrown, green (coloured black granules), black	
Special Colours 1	Blue, grey (coloured black granules)	
Special Colours 2	blue, grey, red, green or marble effect with 80% black granules and 20% coloured granules (colour stable, solid coloured rubber granules)	
Surface Design	Matches the cross pattern of ERR-Safety-Tiles	
Underside	Flat	
Installation on	Bound substrates (cement, asphalt, ...)	

Places of use: Around Safety-Tile-Areas, easy access for wheelchairs, stumble-protection

Installation: „Bevelled Edge Standard“ has to be fully adhered to the substrate (cement, asphalt, H-Blocks). The product is not suitable for installation on crushed gravel. Cutting by hand held utility knife or electric hand saw with a smooth blade. Pay attention to measurement tolerances prior to and while assembling.

Appropriate PU-Glue: Type 1174

Amount of glue needed: app. 150 gr. / pcs. (60mm Version), app. 100 gr. / pcs. (42mm Version)

TOLERANCES AND NOTE ABOUT MATERIAL

*Tolerances in thickness: +/- 2 mm, *Tolerances in measurement: +/- 2 %
 Rubber-Safety-Elements expand under warm conditions and shrink in cold conditions. This reaction can be prevented by fully adhering the bevelled edges to the ground (on bound subgrounds, cement, asphalt, ...).

Juli 2007

Siemensring 25
 53925 Kall
 Deutschland

Tel. +49 (0)2441 5037
 Fax +49 (0)2441 5039

info@err-team.de

more ...
 Information,
 examples of use,
 installation guidelines &
 Tips at:

www.err-team.de