


Horsetiles „HTWA“

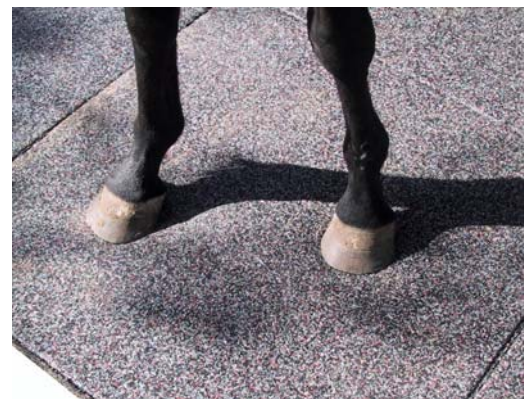

	„HT30WA“	„HT42WA“
Dimensions	1010 x 1010 mm	1010 x 1010 mm
Thickness	30 mm	42 mm
Weight	28 kg	42 kg
Maximum Horse-Weight	max. 400 kg	> 400 kg
Material	Polyurethane bound rubber granules	
Standard Colours	Black-mixcoloured	
Surface-Design	Flat	
Underbody	„Water-Drainage-Canals“	
Water-permeable	Yes. Urine and water are able to drain through the hundreds of canals in the mat.	
Requirements	Compacted grounds, e.g. min. 20 cm of crushed gravel 1-16 mm and top layer of finer gravel 0 – 8 mm.	
Cleaning-interval	Depending on the amount of dirt on and especially under the mats, they need to be cleaned in regular intervals (at least twice a year from both sides). Remove all loose dirt under the mats and let a fair amount of water soak through the mats. If rain rinses the mats regularly – no extra cleaning is necessary.	

Places of use: paddock, stall, roundpen, wash rack

Installation/Assembling: As a top layer we recommend crushed gravel of 0 - 8 mm. The layer should be at least 8 cm thick. Depending on the load the 30 mm or 40 mm version are used. While most of the times the mats are laid loose they can also be glued to each other or - if used on concrete - they can be glued to the ground. Larger areas require a curbing or finished edge. Cutting the mats is easy by using a fret-saw or handheld utility knife (for smaller areas).

Tolerances and note about material: *Tolerances in thickness: +/- 2 mm, *Tolerances in measurement: +/- 2 %. Rubber-Tiles expand under warm conditions and shrink in cold conditions. When the expanding leads to bending of the tiles they have to be shorted by some cm at 2 sides of the area.

We reserve the right to improve the products. July 2007

Siemensring 25
53925 Kall
Germany

Tel. +49 (0)2441 5037
Fax +49 (0)2441 5039

info@err-team.de

more ...
Information,
examples of use,
installation guidelines &
Tips at:

www.err-team.de