


Rubber on a Roll „S950“

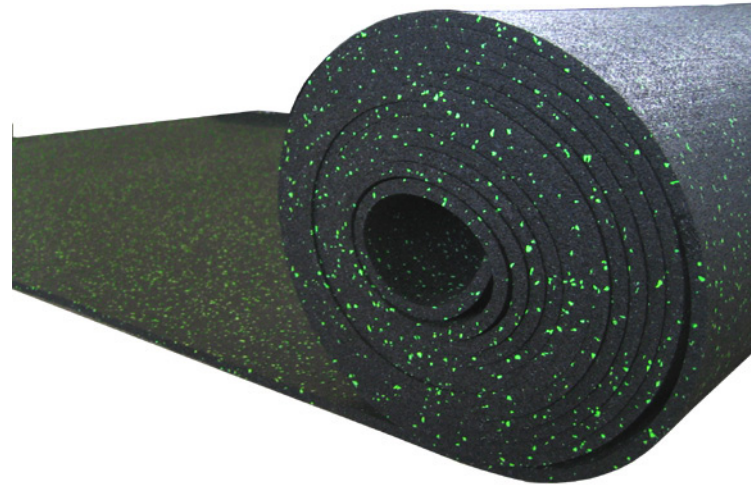

„S950“

Dimensions	10 x 1,5 m
Thickness	10 mm
Weight	140 kg / Rolle
Material	Polyurethane bound rubber granules and buffings
Standard Colours	black-green
Requirements	Bound subgrounds, e.g. concrete, asphalt

Places of use: walkways, wall protection, stall aisles

Installation: Install by using lathes or fix by gluing to the ground (cement, asphalt, ...) Ask a qualified professional to install if gluing is needed. The rolls need to be unrolled upside-down (against the way it has been rolled) for a period of no less than 24 hours in the temperature area where they will be finally installed. Suitable glues are PU- or Dispersion-Glues from Henkel, Uzin, Forbo ...) Test gluing on problematic surfaces is always recommended.

Tolerances and note about material: *Tolerances in thickness: +/- 1 mm, *Tolerances in measurement: +/- 2 %
 Rubber-Rolls expand under warm conditions and shrink in cold conditions. This reaction can be prevented by fully adhering the rolls to the ground (on bound subgrounds, concrete, ...).