


DATASHEET

Rubber Design Mat „HEAT“



<i>Article number</i>	9DR101
<i>Thickness</i>	10 mm
<i>Dimensions</i>	102x102 cm / total surface ca. 101x101cm when puzzled
<i>Installation</i>	floating on suitable, flat grounds. Connect the connectors with a white rubber mallet. cutting with a carpet knife. Leave a gap to the walls (app. 10-15 mm)
<i>Unit</i>	1 m ²
<i>Weight / Unit (kg)</i>	12,0 kg
<i>Surface</i>	vulcanized new rubber, no moisture absorption
<i>Surface design</i>	speckled
<i>Bottom</i>	flat
<i>Colours</i>	dark-grey with black and white speckles
<i>Material</i>	vulcanized rubber, free of heavy metals, free of pthalates
<i>Tolerances</i>	length and width +/- 2%, thickness +/-1 mm
<i>Chem. Behavior</i>	resistent to water, many diluted acids and alkalis; chemically neutral, UV-resistant
<i>Laying direction</i>	In order to achieve a uniform color image, all plates should be laid out in the same direction. The uniform direction is indicated by a mark on the back of the mat.
<i>Fire Class</i>	Classified as C(fl)-S1
<i>Cleaning</i>	Due to the closed surface, the tiles can be cleaned easily. Use commercially available cleaning agents that are not too harsh. Wipe with a damp cloth.
<i>Other colours</i> (min. order 100 m ²)	1 beige 2 light-grey 3 (dark-grey) 4 blue 5 black 6 slate-optic

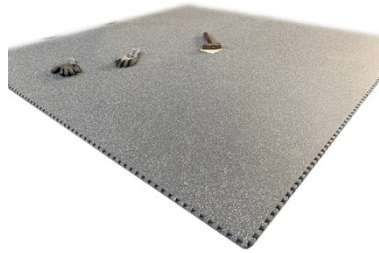