


Solid Rubber Mat Gold

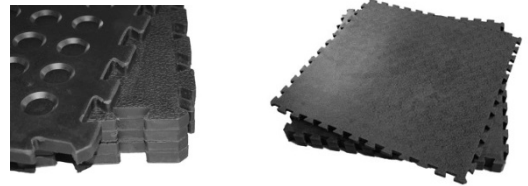

<i>Article number</i>	9GMGOLD
<i>Thickness</i>	18 mm (+ / - 2mm)
<i>Dimensions</i>	app. 100 x 100 cm (+ / - 2%)
<i>Installation</i>	loose, screwing possible
<i>Unit</i>	pcs. (1 m ²)
<i>Weight / Unit (kg)</i>	24 kg
<i>Surface structure</i>	raindrop design
<i>Bottom side</i>	hollow chamber profile
<i>Colour</i>	black
<i>Material</i>	rubber
<i>Dimension tolerances</i>	length and width +/- 1%, thickness (+/- 2mm)
<i>Fire Class (EN 13501-1:2010)</i>	E_{fl}
<i>Places of use</i>	Gold is our best quality solid rubber tile for universal use. Because of its supreme quality it is mainly sold to gyms and fitness clubs. Horse owners also appreciate the high quality floor for many areas in stables.
<i>Requirement to substructure</i>	Solid substructure (e.g.) cement
<i>Installation</i>	Let mats adjust to room temperature for 24 hours. Place puzzle connectors over each other and step on the connectors – or use a rubber hammer. Use some kind of alignment to receive straight area outlines. Leave app. 1-2cm from each connecting wall since rubber tiles are likely to expand. Cut by using a fret saw or a carpenter knife.
<i>Cleaning</i>	Avoid great amounts of dirt on the rubber mat by using appropriate solutions in all entrance areas. The rubber mats can be vacuum / broom cleaned. If using water and a mild detergent make sure to only use a moist but not totally wet cloth. Too much water could be soaked under the mats. For the same reason, spilled liquids need to be removed in a timely manner.